

Hierarchically Consistent Motion Primitives for Quadrotor Coordination

Marijan Vukosavljev, Angela P. Schoellig, and Mireille E. Broucke

Abstract—We present a hierarchical framework for motion planning of a large collection of agents. The proposed framework starts from low level motion primitives over a gridded workspace and provides a set of rules for constructing higher level motion primitives. Our hierarchical approach is highly scalable and robust making it an ideal tool for planning for multi-agent systems. Results are demonstrated experimentally on a collection of quadrotors that must navigate a cluttered environment while maintaining a formation.

I. INTRODUCTION

This paper proposes a hierarchical construction of motion primitives for motion planning of multi-vehicle systems. The framework allows designers to incrementally build up more complex motion primitives from simpler ones in a systematic, rigorous way, without the need to redesign feedback controllers. This approach dramatically reduces the overall complexity of motion planning.

To illustrate our vision, consider a control system with two outputs. Suppose the output space has been gridded into boxes, and we have feedback controllers for a finite set of *atomic motion primitives*. In Figure 2 we show five atomic motion primitives. Motion primitives at Level 1 are formed from sets of sequences of Level 0 motion primitives. For example, two successive *Right* atomic motion primitives from Level 0 form the *TwoRight* motion primitive at Level 1. Progressively more complex behaviors are similarly defined without compromising consistency with the vehicle dynamics.

Hierarchy is a common theme to simplify and scale up control design and has many applications [4], [9], [12], [19]. Motion primitives have been applied in [6], [7], [16]. Abstraction as it relates to hierarchy has been studied in [1], [3], [8], [21], [25]. What distinguishes our hierarchical approach is that we span continuous state feedback control at the low level up to discrete planning at the higher levels, without resorting to approximations, while maintaining hierarchical consistency, and without compromising provably correct behavior.

A motivating application is coordination of quadrotors [2], [5], [10], [14], [15], [18], [20]. We formulate the formation control problem as a reach avoid problem with *behavior constraints*. As far as we know, no other approach uses this formulation, and consequently we recover new behaviors in formation control. For example, we are able to navigate a

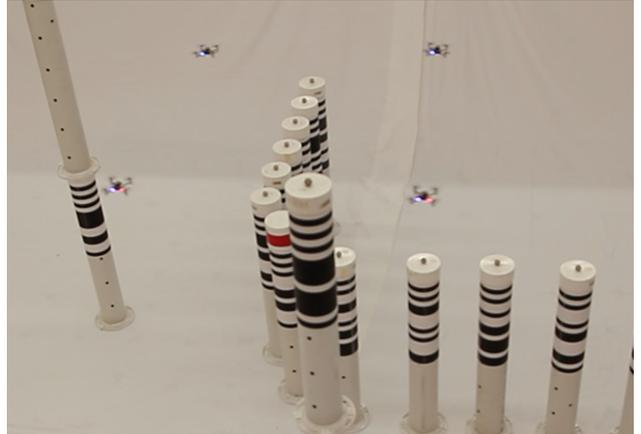


Fig. 1. Four tiny Crazyflie quadrotors navigate a cluttered environment while maintaining a square formation. A video illustrating the results can be found at <http://tiny.cc/hier-moprim>.

formation of quadrotors interleaving them around a set of obstacles, while maintaining strict safety guarantees.

This research is an outgrowth of our modular framework for motion planning based on motion primitives [22], [23]; the notions of atomic motion primitives and the *maneuver automaton* were introduced there. This paper supplies the necessary details to understand how hierarchical motion primitives can be built up from atomic motion primitives. At the same time we suppressed theoretical details including proofs which will be made available in a forthcoming journal paper.

Notation. Let $|\cdot|$ denote the cardinality of a set. If A is a set, let $\mathcal{P}(A)$ denote its power set. The set difference of A and B is denoted $A \setminus B$. For a collection of sets $\{A_i\}_{i=1}^n$, the cartesian product is denoted $\prod_{i=1}^n A_i$; when $n = 2$, we may write $A_1 \times A_2$, and when $A_i = A$ for all $i = 1, \dots, n$, we may write A^n (which in general should not be confused with superscripts for indexing in other contexts). Let \mathbb{Z} and \mathbb{R} denote the integers and the real numbers, respectively.

II. PROBLEM STATEMENT

Consider the general nonlinear control system

$$\dot{x} = f(x, u), \quad y = h(x), \quad (1)$$

where $x \in \mathbb{R}^n$ is the state, $u \in \mathbb{R}^m$ is the input, and $y \in \mathbb{R}^p$ is the output. Let $y(\cdot, x_0)$ denote the output trajectory of (1) starting at initial condition $x_0 \in \mathbb{R}^n$ and under some open-loop or feedback control. We make a standing assumption that the outputs of (1) are a subset of the states and that the vector field is invariant to the value of the output. This symmetry property is satisfied for many robotic systems, for

Marijan Vukosavljev and Mireille E. Broucke are with the Dept. of Electrical and Computer Engineering, University of Toronto, Canada (e-mails: mario.vukosavljev@mail.utoronto.ca, broucke@control.utoronto.ca). Angela P. Schoellig is with the University of Toronto Institute for Aerospace Studies (UTIAS), Canada (email: schoellig@utias.utoronto.ca). Supported by the Natural Sciences and Engineering Research Council of Canada (NSERC).

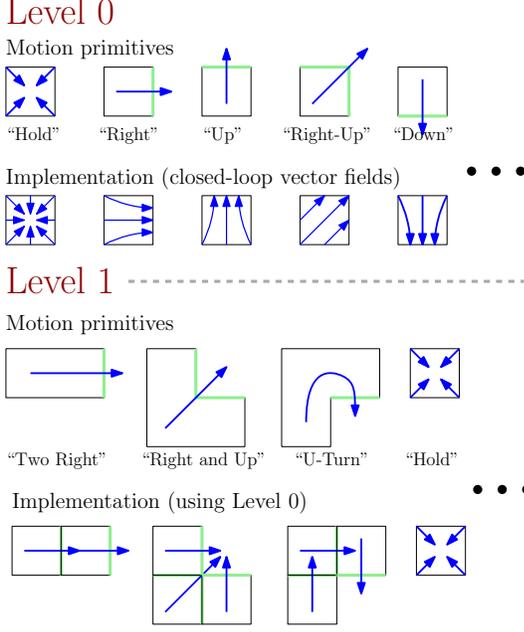


Fig. 2. An example of motion primitives designed at two hierarchical levels over a gridded two dimensional output space.

example when the outputs are positions, and it allows motion primitives to be designed only over a single box in a gridded output space [6], [23].

Fix a *grid length vector* $d = (d_1, \dots, d_p)$ where $d_i > 0$. The gridded output space is constructed by translating the canonical box $Y^* := \prod_{i=1}^p [0, d_i]$. That is, associated with each $l \in \mathbb{Z}^p$ is a shifted box $Y_l := \prod_{i=1}^p [l_i d_i, (l_i + 1)d_i]$. We call $l \in \mathbb{Z}^p$ the *box index* of Y_l . We identify a (non-empty) set of feasible boxes in terms of their box indices $L_f \subset \mathbb{Z}^p$. The feasible boxes arise from control specifications including obstacle avoidance, collision avoidance, communication constraints, and others. Similarly, we identify a (non-empty) set of goal boxes in terms of their box indices $L_g \subset L_f$.

Now consider an output trajectory $y(\cdot, x_0)$ for some control and initial condition $x_0 \in \mathbb{R}^n$. We associate to $y(\cdot, x_0)$ a discretized trajectory called a *run* that records the boxes that the output trajectory visits; see [11] for a formal definition. The run is denoted as $y_r := l_1 l_2 \dots$, where $l_i \in \mathbb{Z}^p$ is a box index. We define the *behavior* induced by $y(\cdot, x_0)$ to be the sequence of box index increments $y_b := \kappa_1 \kappa_2 \dots$, where $\kappa_i := l_{i+1} - l_i$. Because y_r records every box visited by the output trajectory, we have that $\kappa_i \in \{-1, 0, 1\}^p \setminus \{0\}$. That is, the increment in any coordinate is of magnitude at most 1, and the overall increment is never 0. Let \mathcal{B} denote the empty sequence and all finite and infinite sequences on $\{-1, 0, 1\}^p \setminus \{0\}$. We define a *behavioral constraint* $\widehat{\mathcal{B}} \subset \mathcal{B}$ to be any non-empty subset of \mathcal{B} .

Problem 2.1 (Behavior-Constrained Reach-Avoid):

Consider the system (1) with a gridded output space in terms of grid length vector $d \in \mathbb{R}^p$. We are given goal boxes L_g , feasible boxes L_f , and a behavioral constraint $\widehat{\mathcal{B}} \subset \mathcal{B}$. Find a feedback control $u(x)$ and a set of initial conditions

$\mathcal{X}_0 \subset \mathbb{R}^n$ such that for each $x_0 \in \mathcal{X}_0$:

- (i) **Avoid:** $y(t, x_0) \notin \mathbb{R}^p \setminus \left(\bigcup_{l \in L_f} Y_l \right)$ for all $t \geq 0$,
- (ii) **Reach:** there exists $T \geq 0$ such that for all $t \geq T$, $y(t, x_0) \in \bigcup_{l \in L_g} Y_l$,
- (iii) **Behavior:** $y_b \in \widehat{\mathcal{B}}$.

III. HIERARCHICAL MOTION PRIMITIVES

In this section we present the hierarchical construction of motion primitives. First we recall the definition of a maneuver automaton (MA) from our previous work [22], [23], as it serves as the level 0 or base case of the construction.

A. Maneuver Automaton

A *maneuver automaton* (MA) is a hybrid system whose discrete modes correspond to motion primitives. Each level 0 motion primitive has associated to it a continuous time closed-loop vector field obtained by applying a state feedback law to (1). The edges of the MA model feasible successive motion primitives. A motion primitive generates some desired behavior of the output trajectories of the closed-loop system over a box in the output space. Because of the uniform gridding of the output space into boxes and because of the symmetry assumption on the outputs, level 0 motion primitives are designed only over Y^* . The MA applies state resets to ensure that output trajectories remain in Y^* . Real, physical trajectories clearly do not undergo such resets and instead output trajectories move continuously from box to box.

Definition 3.1: Consider the system (1) and the box Y^* with grid length vector d . The level 0 *maneuver automaton* (0-MA) is a tuple $\mathcal{H}^0 = (Q^0, \Sigma^0, E^0, I^0, Q^{0,0}, X^0, G^0, R^0)$, where

State Space $Q^0 = M^0 \times \mathcal{X}^0$ is the hybrid state space, where $M^0 = \{m_1^0, m_2^0, \dots\}$ is a finite set of level 0 motion primitives, and $\mathcal{X}^0 = \mathbb{R}^n$ is the continuous state space.

Labels $\Sigma^0 = \{(0, \kappa) \mid \kappa \in \{-1, 0, 1\}^p\}$ is a finite set of event labels, where $\sigma = (0, \kappa) \in \Sigma^0$ describes a possible neighbouring direction κ from the p -dimensional box Y^* at location 0.

Edges $E^0 \subset M^0 \times \Sigma^0 \times M^0$, is a finite set of edges, describing allowable concatenations of motion primitives.

Invariants $I^0 : M^0 \rightarrow \mathcal{P}(\mathbb{R}^n)$ assigns a bounded invariant set $I^0(m)$ to each $m \in M^0$ that defines the region on which the vector field $X^0(m)$ is defined.

Initial Conditions $Q^{0,0} \subset Q^0$ is a set of initial conditions.

Vector Field $X^0 : M^0 \rightarrow \{f_m^0\}_{m \in M^0}$ assigns to each $m \in M^0$ a globally Lipschitz closed-loop vector field of the form $f_m^0(\cdot) = f(\cdot, u_m(\cdot))$, where $u_m(\cdot)$ is the state feedback controller associated with $m \in M^0$.

Enabling Conditions $G^0 : E^0 \rightarrow \{g_e^0\}_{e \in E^0}$ assigns to each edge $e = (m, \sigma, m') \in E^0$ a non-empty enabling or guard condition $g_e^0 \subset I^0(m)$.

Reset Conditions $R^0 : E^0 \rightarrow \{r_e^0\}_{e \in E^0}$ assigns to each edge $e = (m, \sigma, m') \in E^0$ a reset map $r_e^0 : \mathbb{R}^n \rightarrow \mathbb{R}^n$. Resets of states are determined by the event $\sigma \in \Sigma^0$, and

they only affect the output coordinates in order to maintain output trajectories inside the canonical box Y^* . \triangleleft

The semantics of a level 0 MA involve the standard notion of an *execution* of a hybrid system [13], [23]. Informally, the continuous state evolves over the invariant of the current discrete mode $m \in M^0$ according to the vector field assigned to m , and an edge is taken when the continuous state reaches an enabling condition, thereby updating the discrete mode as well as resetting the continuous state. We shall denote a level 0 execution as $\chi^0 = (\tau^0, m^0, x^0)$, where τ^0 is a *hybrid time domain* consisting of time intervals (e.g. $\tau^0 = \{[0, 2], [2, 3.5], \dots\}$), m^0 is a sequence of level 0 motion primitives recording the motion primitive over each time interval, and x^0 is the continuous state as a function of time.

B. Higher Level Maneuver Automata

We want to extend the notions of motion primitives, maneuver automata, and executions of an MA from level 0 to higher levels by a hierarchical construction that builds level k using only information from level $k - 1$. We begin with the discrete part of \mathcal{H}^0 since its extension to level $k > 0$ is straightforward.

The discrete part of \mathcal{H}^0 is given by the tuple (M^0, Σ^0, E^0) , representing a graph with nodes M^0 (the level 0 motion primitives), edges E^0 , and labels Σ^0 . Analogously, the discrete part of the level $k > 0$ MA, \mathcal{H}^k , is a tuple (M^k, Σ^k, E^k) , representing a graph over level k motion primitives. Because level k motion primitives may be defined over more boxes than just Y^* , the event labels Σ^k on transitions must be accordingly generalized.

For example, consider the level 1 motion primitive in Figure 2 called *U-Turn*. It is constructed by concatenating three level 0 motion primitives: *Up*, *Right*, and *Down*. *U-Turn* may, in turn, be concatenated with other level 1 motion primitives encoded by an edge $e = (m, s, m') \in E^1$ where $m \in M^1$ denotes *U-Turn* and $m' \in M^1$ denotes a possible next level 1 motion primitive. First we attach a reference frame in the gridded output space for primitive m with an arbitrary base point o_m , say the lower left box. The role of $s = (l, \kappa) \in \Sigma^1 \subset \mathbb{Z}^2 \times \{-1, 0, 1\}^2$ is then to encode the fact that the transition from m to m' occurs downwards from the upper right box Y_l . Therefore $s = ((1, 1), (0, -1))$.

Now consider the continuous time part of \mathcal{H}^0 . It consists of a continuous state space $\mathcal{X}^0 = \mathbb{R}^n$, a set of continuous time closed-loop vector fields X^0 , a set of invariants I^0 that specify the domain of each vector field, and the enabling conditions G^0 and reset maps R^0 that specify how continuous states must be reset upon reaching an enabling condition. These notions are extended to level k as follows.

The continuous state space \mathcal{X}^0 is reinterpreted at level k as a (discrete) state space $\mathcal{X}^k = \mathbb{Z}^p \times M^{k-1}$, consisting of the pairs (l, μ) , with $l \in \mathbb{Z}^p$ identifying a box index (or offset) and $\mu \in M^{k-1}$ identifying a level $k - 1$ motion primitive. Similarly, the notion at level 0 of a continuous state trajectory, which is a function of time, is replaced at level k by a discrete sequence of (l, μ) pairs.

The continuous time vector fields at level 0 are replaced by a set of discrete maps. For motion primitive $m \in M^k$, the discrete map $f_m^k : \mathcal{X}^k \times \Sigma^{k-1} \rightarrow \mathcal{X}^k$ defines the *internal transitions* on $(l, \mu) \in \mathbb{Z}^p \times M^{k-1}$ pairs that make up motion primitive m . These discrete maps must adhere to the constraints on successive level $k - 1$ motion primitives as specified in \mathcal{H}^{k-1} (formal details are below). The invariant $I^k(m)$ is the set of (l, μ) pairs that the discrete map f_m^k acts on. The index l in the pair (l, μ) identifies the origin of the frame for $\mu \in M^{k-1}$ w.r.t. the frame for $m \in M^k$.

The enabling conditions and reset maps take the analogous meanings as in \mathcal{H}^0 . They define the *external transitions* from primitive $m \in M^k$ to other level k motion primitives (including m itself). To properly define reset maps, it is necessary to keep track of reference frames for the various primitives involved. Suppose we have three frames for the three primitives $m, m' \in M^k$, and $\mu \in M^{k-1}$, respectively. When an internal or external transition occurs, the next primitive effectively starts from a shifted frame. This shift is recorded in terms of the base point of each frame, denoted $o_m, o_{m'}$, and o_μ , respectively. For example, the origin of the frame for μ w.r.t. the frame for m is denoted by o_μ^m . Similarly, the origin of the frame for m' w.r.t. the frame for m is denoted by $o_{m'}^m$.

Definition 3.2: Suppose we are given a level $k - 1$ MA \mathcal{H}^{k-1} , where $k \geq 1$. A MA at level k is a tuple $\mathcal{H}^k = (Q^k, \Sigma^k, E^k, I^k, Q^{k,0}, X^k, G^k, R^k)$, where

State Space $Q^k = M^k \times \mathcal{X}^k$ is the hybrid state space, where $M^k = \{m_1^k, m_2^k, \dots\}$ is a finite set of motion primitives at level k , and $\mathcal{X}^k = \mathbb{Z}^p \times M^{k-1}$ is the analogue of the notion of a continuous state space at level 0.

Labels $\Sigma^k = \{s_1^k, s_2^k, \dots, \mid s_i^k \in \mathbb{Z}^p \times \{-1, 0, 1\}^p\}$ is a finite set of event labels. If $s = (l_s, \kappa_s) \in \Sigma^k$, then $l_s \in \mathbb{Z}^p$ is the box index w.r.t. a frame for some primitive $m \in M^k$ from which an external transition occurs, and κ_s identifies the face of the box through which the transition occurs.

Edges $E^k \subset M^k \times \Sigma^k \times M^k$ is a finite set of edges describing which level k motion primitives can be concatenated.

Invariants $I^k : M^k \rightarrow \mathcal{P}(\mathcal{X}^k)$ assigns to each motion primitive $m \in M^k$ a non-empty, finite set of states $I^k(m) \subset \mathcal{X}^k$ on which the transition function $f_m^k : \mathcal{X}^k \times \Sigma^{k-1} \rightarrow \mathcal{X}^k$ (defined below) acts. The box indices $l \in \mathbb{Z}^p$ for pairs $(l, \mu) \in I^k(m)$ correspond to the origin of the frame for $\mu \in M^{k-1}$ w.r.t. the frame for $m \in M^k$. The invariant is different from the *envelope* of $m \in M^k$, denoted $L^k(m)$, which is the collection of all box indices w.r.t. the frame for m accumulated from the envelopes of the lower level primitives that constitute m .

Initial Conditions $Q^{k,0} \subset Q^k$ assigns a set of initial states, satisfying: if $(m, x) \in Q^{k,0}$, then $x \in I^k(m)$.

Transition Functions $X^k : M^k \rightarrow \{f_m^k\}_{m \in M^k}$ assigns to each $m \in M^k$ a transition function $f_m^k : \mathcal{X}^k \times \Sigma^{k-1} \rightarrow \mathcal{X}^k$ that specifies all the allowable *internal transitions* between $(l, \mu) \in I^k(m)$ pairs that together constitute the level k motion primitive. Consider $(l, \mu) \in I^k(m)$ and $\sigma = (l_\sigma, \kappa_\sigma) \in \Sigma^{k-1}$, such that $l + l_\sigma + \kappa_\sigma \in L^k(m)$ (identifying

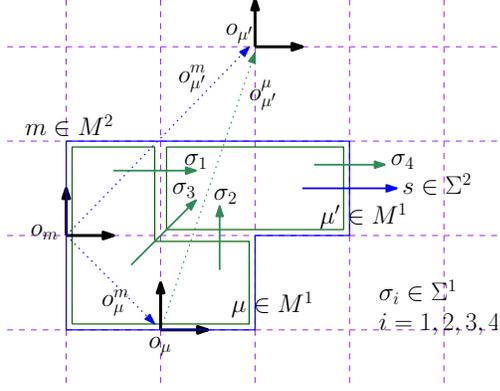


Fig. 3. An example of level 1 and level 2 motion primitive reference frames, inspired from the $p = 2$ output example from Figure 2. The primitive $m \in M^2$ consists of two primitives $\mu, \mu' \in M^1$.

that this is an internal transition) and such that $(\mu, \sigma, \mu') \in E^{k-1}$ for some $\mu' \in M^{k-1}$. If $f_m^k((l, \mu), \sigma) = (l', \mu')$, then (i) $(l', \mu') \in I^k(m)$; (ii) $(\mu, \sigma, \mu') \in E^{k-1}$; and (iii) $l = o_\mu^m$, $l' = o_{\mu'}^m$, and $l' - l = o_{\mu'}^\mu$.

Enabling Conditions $G^k : E^k \rightarrow \{g_e^k\}_{e \in E^k}$ assigns to each edge $e = (m, s, m') \in E^k$ a non-empty enabling condition $g_e^k \subset I^k(m)$. If $s = (l_s, \kappa_s) \in \Sigma^k$, the first requirement is that $l_s + \kappa_s \notin L^k(m)$, identifying that this is an external transition. Then g_e^k consists of all those pairs $(l, \mu) \in I^k(m)$ for which an *external transition* to a consecutive level k motion primitive can occur. That is, $(l, \mu) \in g_e^k$ if there exists (a unique) $\sigma = (l_\sigma, \kappa_\sigma) \in \Sigma^{k-1}$ such that (i) there exists $\tilde{\mu} \in M^{k-1}$ such that $(\mu, \sigma, \tilde{\mu}) \in E^{k-1}$; (ii) $l = o_\mu^m$, $l_s = l_s^m$ is the index w.r.t. the frame for m for the box from which the external transition occurs, and $l_\sigma = l_\sigma^\mu$ is the index w.r.t. the frame for μ for the same box. Therefore $l_s = l_s^m = o_\mu^m + l_\sigma^\mu = l + l_\sigma$ and $\kappa_\sigma = \kappa_s$.

Reset Conditions $R^k : E^k \rightarrow \{r_e^k\}_{e \in E^k}$ assigns to each edge $e = (m, s, m') \in E^k$ a reset map $r_e^k : \mathcal{X}^k \times \Sigma^{k-1} \rightarrow \mathcal{X}^k$ that characterizes the *external transitions* of $m \in M^k$. Associated with e is a unique transformation $o_{m'}^m \in \mathbb{Z}^p$ relating the frames of m and m' for this external transition. Consider $s = (l_s, \kappa_s) \in \Sigma^k$, $\sigma = (l_\sigma, \kappa_\sigma) \in \Sigma^{k-1}$, and $(l, \mu) \in g_e^k$ such that $l_\sigma = l_\sigma^\mu = l_\sigma^m - o_\mu^m = l_s - l$ and $\kappa_\sigma = \kappa_s$. If $r_e^k((l, \mu), \sigma) = (l', \mu')$, then (i) $(l', \mu') \in I^k(m')$; (ii) $(\mu, \sigma, \mu') \in E^{k-1}$; (iii) $l = o_\mu^m$, $l' = o_{\mu'}^m$, and $(l' + o_{m'}^m) - l = o_{\mu'}^\mu$. \triangleleft

Example 3.1: Returning to the two level hierarchy of Figure 2, suppose we want to design motion primitives at level 2 based on the existing motion primitives at level 1. Consider the candidate motion primitive $m \in M^2$ formed by the concatenation of the two level 1 motion primitives $\mu = \text{Right\&Up}$ and $\mu' = \text{TwoRight}$. Figure 3 shows all the geometric information to understand how μ and μ' are laid out relative to each other to construct m .

The invariant for m is $I^2(m) = \{(l, \mu), (l', \mu')\}$, where $l = (-1, 1)$ and $l' = (2, 2)$ are the indices w.r.t. to the frame for m for the boxes to which the frames for μ and μ' , respectively, are attached. Three internal transitions are

encoded in the transition function f_m^2 , corresponding to the level 1 edges $e_i = (\mu, \sigma_i, \mu') \in E^1$, $i = 1, 2, 3$. For example, the level 2 internal transition $f_m^2((l, \mu), \sigma_1) = (l', \mu')$ is implemented by a level 1 edge $e_1 \in E^1$ with associated event $\sigma_1 = (l_{\sigma_1}, \kappa_{\sigma_1}) \in \Sigma^1$. In the frame of o_μ , the transition occurs from the box $l_{\sigma_1} = (-1, 1)$ through its right face $\kappa_{\sigma_1} = (1, 0)$.

There is one level 2 external transition for $m \in M^2$ with an associated edge $e = (m, s, m') \in E^2$. In turn, it corresponds to a level 1 edge $e_4 = (\mu', \sigma_4, \mu'') \in E^1$ and event $\sigma_4 \in \Sigma^1$. Thus, $r_e^2((l', \mu'), \sigma_4) = (l'', \mu'')$ for some $(l'', \mu'') \in I^2(m')$. The event $\sigma_4 = (l_{\sigma_4}, \kappa_{\sigma_4})$ is expressed in the frame of $o_{\mu'}$, while the event $s = (l_s, \kappa_s) \in \Sigma^2$ is expressed in the frame of o_m . Thus, $l_{\sigma_4} = (0, -2)$, $\kappa_{\sigma_4} = (1, 0)$, $l_s = (2, 0)$, and $\kappa_s = (1, 0)$. \triangleleft

For $k \geq 1$ we define the notation $\mathcal{H}^{k-1} \preceq \mathcal{H}^k$ to mean that \mathcal{H}^k is an abstraction built up from \mathcal{H}^{k-1} according to Definition 3.2. In analogy with \mathcal{H}^0 , we define an *execution at level $k > 0$* , denoted as $\chi^k = (\tau^k, m^k, x^k)$. There are two differences from χ^0 . First, the hybrid time domain τ^k is a sequence of sets of discrete times (e.g. $\tau^k = \{\{0, 1, 2\}, \{3\}, \{4, 5\}, \dots\}$), where each set consists of the discrete times when internal transitions occur. Second, continuous and discrete transitions at level 0 are replaced by internal and external transitions, respectively, at level k .

C. Hierarchical Maneuver Automaton

Now consider a collection of maneuver automata, $\mathcal{H} = \{\mathcal{H}^k\}_{k=0}^K$, where $K \geq 0$, such that for all $k = 1, \dots, K$, $\mathcal{H}^{k-1} \preceq \mathcal{H}^k$. We call \mathcal{H} a *hierarchical maneuver automaton* (HMA).

Next, we can also define an overall *hierarchical execution* by stacking together each execution at level k . Suppose that a level 0 event occurs from the current level 0 motion primitive. This event is either interpreted as an internal or external transition at level 1. If it is internal, the transition function X^1 determines the next motion primitive at level 0 (and the continuous state is reset with R^0). Otherwise, this event is propagated up the hierarchy until it is registered as internal at some level $1 \leq K' \leq K$ or external at level K . In the former case, the transition function $X^{K'}$ determines the next motion primitive at level $K' - 1$, while in the latter case the reset map R^K determines the next motion primitive at level K . An internal transition at level K' is always implemented as an external transition at the levels $K' - 1$ to 0. The reset maps update the motion primitive at each level below. For example, if there is an internal transition at level 3, then at level 2, R^2 determines the next level 1 primitive, R^1 determines the next level 0 primitive, and R^0 resets the continuous state.

Recalling our definition of the behavior induced by an output trajectory $y(\cdot, x_0)$, we can likewise define the behavior induced by a hierarchical execution.

Definition 3.3: Let $\mathcal{H} = \{\mathcal{H}^k\}_{k=0}^K$ be an HMA and let $\chi = \{\chi^k\}_{k=0}^K$ be a hierarchical execution of \mathcal{H} . The *behavior* of χ is defined to be the behavior of its associated χ^0 ; namely it is a sequence $\kappa_1 \kappa_2 \dots$ where $\sigma_i = (0, \kappa_i)$ is the i -th event at level 0. The *language* of \mathcal{H} denoted by $\mathcal{L}(\mathcal{H})$ is the set

of all behaviors induced by the hierarchical executions of \mathcal{H} .

◁

IV. SOLUTION OF PROBLEM 2.1

In this section we give the main elements of the solution to Problem 2.1 using hierarchical motion primitives.

Definition 4.1: Let $\mathcal{H} = \{\mathcal{H}^k\}_{k=0}^K$ be a HMA. We say that \mathcal{H} is *well-posed* if (i) each hierarchical execution χ induces a unique behavior in \mathcal{B} , and (ii) for all initial conditions of a hierarchical execution, there exists a maximal extension to a hierarchical execution such that its level 0 execution is infinite.

◁

Ideally, we would provide a collection of checkable conditions in terms of HMA parameters, and then *prove* that we obtain a well-posed HMA. See [23] where such proofs are supplied for \mathcal{H}^0 only. We have adopted Definition 4.1 in order to focus this paper on high level ideas.

Definition 4.2: Let $\mathcal{H} = \{\mathcal{H}^k\}_{k=0}^K$ be a HMA with $K \geq 1$. We say that \mathcal{H} is *complete* if the following hold:

$$M^K = \{m^*\}, E^K = \emptyset, Q^{K,0} = \{(m, x) \in Q^K \mid x \in I^k(m)\}.$$

That is, at level K there is only one motion primitive, there are no external transitions, and all states are valid initial conditions.

◁

Completeness provides a hierarchy \mathcal{H} whose top level acts as a *control policy* dictating the assignment of motion primitives one level below, with those motion primitives dictating the assignment of motion primitives below that, and so on. In practice, the control policy yielding a complete \mathcal{H} is obtained by running a planning algorithm at level $K - 1$ using only the discrete part $(M^{K-1}, \Sigma^{K-1}, E^{K-1})$, which is a (non-deterministic) graph with labeled transitions. For the reach-avoid problem, one may adapt our algorithm from [23] for planning at level $K - 1$, or other graph search methods may be employed. The main advantage of planning at this higher level is that the desired behavior will be automatically enforced, and ideally there are significantly less transitions as compared to planning at level 0. Some additional technical considerations arise to ensure that the goal boxes are compatible with the envelopes of the level $K - 1$ primitives.



Our main result gives three conditions to solve Problem 2.1. Condition (i) ensures the avoid specification by requiring that all the possible visited boxes (the envelope of m^*) are contained in the feasible boxes. Condition (ii) ensures the reach specification is met. Condition (iii) ensures the satisfaction of the behavioral constraint.

Theorem 4.1: Consider the system (1) with a gridded output space in terms of grid length vector $d \in \mathbb{R}^p$. We are given a feasible and goal set of boxes, $L_g \subset L_f \subset \mathbb{Z}^p$ and a behavioral constraint $\widehat{\mathcal{B}} \subset \mathcal{B}$. Consider a HMA $\{\mathcal{H}^k\}_{k=0}^K$, which is well-posed and complete. Suppose that

- (i) $L^K(m^*) \subset L_f$,
- (ii) all hierarchical executions of \mathcal{H} reach some subset of boxes of L_g and never leave,
- (iii) $\mathcal{L}(\mathcal{H}) \subset \widehat{\mathcal{B}}$.


$$\mathcal{H}^0 = \mathcal{H}_{\mathcal{H}\mathcal{F}\mathcal{B}} \quad (p=1 \text{ with outputs: } y_1)$$

$$M^0 = M_{\mathcal{H}\mathcal{F}\mathcal{B}} = \{\mathcal{H}, \mathcal{F}, \mathcal{B}\} \quad E^0 = E_{\mathcal{H}\mathcal{F}\mathcal{B}}$$



$$\mathcal{H}^0 = \mathcal{H}_{\mathcal{H}\mathcal{F}\mathcal{B}} \parallel \mathcal{H}_{\mathcal{H}\mathcal{F}\mathcal{B}} \quad (p=2 \text{ with outputs: } y_1, y_2)$$

$$M^0 = (M_{\mathcal{H}\mathcal{F}\mathcal{B}})^2$$



E^0 - too large to depict
computed combinatorially
with two copies of $E_{\mathcal{H}\mathcal{F}\mathcal{B}}$

Fig. 4. This figure illustrates a level 0 MA design \mathcal{H}^0 for a system of p double integrators. The top row shows the atomic motion primitives M^0 and their edges E^0 for one double integrator ($p = 1$), which are *Hold* (\mathcal{H}), *Forward* (\mathcal{F}), and *Backward* (\mathcal{B}). The bottom row shows that two copies of the $p = 1$ design may be composed to yield motion primitives for $p = 2$. This procedure extends easily to an arbitrary number of p outputs.

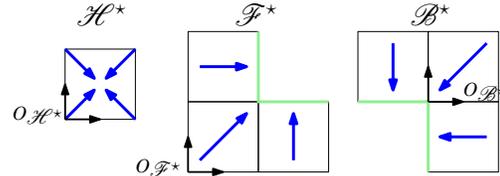


Fig. 5. This figure illustrates a level 1 MA design \mathcal{H}^1 to achieve the formation behavioral constraint. It is built as an abstraction of the level 0 MA \mathcal{H}^0 shown in Figure 4. Although this figure illustrates the case of two outputs $p = 2$, this design is easily scalable with respect to any \mathcal{H}^0 (of the form shown in Figure 4), which may have any number of p outputs.

Then there exists a set of initial conditions \mathcal{X}_0 and an associated feedback control strategy $u(x)$ solving Problem 2.1.

V. FORMATION CONTROL

In this section we show how hierarchical motion primitives can be used to solve a formation control problem. To illustrate ideas, we consider two agents, each modeled as a double integrator with a scalar output. The behavioral constraint to maintain a formation of two agents, each with one output, is that if one agent incurs an increment in its output value due to the application of a motion primitive, then the other agent experiences the same increment in the successive motion primitive. Consider a behavior $y_b = \kappa^1 \kappa^2 \dots \in \mathcal{B}$ of the multi-agent system, where $\kappa^i = (\kappa_1^i, \kappa_2^i)$. We require that for all $i \geq 1$,

$$\left| \sum_{l=1}^i (\kappa_1^l - \kappa_2^l) \right| \leq 1. \quad (2)$$

Under this behavioral constraint, the relative value of the two outputs is maintained while at the same time a sequence of motion primitives to achieve a reach-avoid specification is executed by the multi-agent system. The behavioral constraint can be easily generalized to N agents.

To implement the formation behavioral constraint using hierarchical motion primitives, we propose a two level hierarchy

consisting of the MA's, \mathcal{H}^0 and \mathcal{H}^1 .

First, the level 0 (atomic) motion primitives for each agent are: *Hold* (\mathcal{H}), *Forward* (\mathcal{F}), and *Backward* (\mathcal{B}), corresponding to the agent's output holding its value (remaining in the current box of the gridded 1D output space), increasing its value (moving to a box to the right), or decreasing its value (moving to a box to the left). Each agent i is equipped with a level 0 maneuver automaton denoted $\mathcal{H}^{0,i} = \mathcal{H}\mathcal{F}\mathcal{B}$, $i = 1, \dots, N$, as shown in Figure 4.

Second, to obtain a level 0 maneuver automaton for the two agent system, we take the parallel composition of the individual MA's to form the MA $\mathcal{H}^0 = \mathcal{H}^{0,1} \parallel \mathcal{H}^{0,2}$. More generally, for p agents we would form $\mathcal{H}^0 = \parallel_{j=1}^p \mathcal{H}^{0,j}$. Details on how to construct the parallel composition of maneuver automata are found in [23]. Figure 4 illustrates some of the level 0 motion primitives for the two agents, including $\mathcal{H}\mathcal{H}$, $\mathcal{F}\mathcal{H}$, and so forth for all the possible neighboring directions in 2D.

Finally, the level 1 motion primitives for the two agent system are: *Formation Forward* (\mathcal{F}^*), *Formation Backward* (\mathcal{B}^*), and *Formation Hold* (\mathcal{H}^*). These are depicted in Figure 5. It is easy to see that the concatenation of these level 1 motion primitives satisfies the desired behavior (2). Once again, this design is easily generalized to N agents.

VI. EXPERIMENTAL RESULTS AND CONCLUSION

It is well known that the model of a quadrotor is differentially flat, and so the nonlinear dynamics can be reduced to three independent double integrators for each of the world frame coordinates (x_w, y_w, z_w) [18]. Suppose we have a collection of N quadrotors. The corresponding multi-vehicle system (1) has $p = 3N$ outputs with $n = 6N$ states. We use our formation hierarchical motion primitives to solve Problem 2.1 with a formation behavior constraint.

First, we grid the 3D physical space and identify obstacles. A formation configuration is specified in terms of the relative box offsets between the vehicles to a chosen representative vehicle and a goal box is specified for the representative. Although the full gridded output space for the N agent system is obtained by composing the gridded 3D physical space N times, we do not compute it explicitly because N may be large. Moreover, instead of specifying the feasible boxes $L_f \subset \mathbb{Z}^p$, we define virtual obstacles in 3D based the representative vehicle locations, the formation configuration, and physical obstacles. The behavioral constraint $\tilde{\mathcal{B}}$ on the full gridded space consists of the constraint (2) applied to each physical directions (x_w, y_w, z_w) independently on the N vehicles.

Next, we group together all outputs of the N agents corresponding to each workspace direction x_w , y_w , and z_w , and to each such group we appropriate one level 1 MA, $\mathcal{H}_{\mathcal{H}^* \mathcal{F}^* \mathcal{B}^*}$. Then we take the parallel composition of these three MA's for the three workspace directions to obtain $\mathcal{H}^1 = \parallel_{j=1}^3 \mathcal{H}_{\mathcal{H}^* \mathcal{F}^* \mathcal{B}^*}$, which has $3^3 = 27$ motion primitives, independent of N . The resulting HMA $\mathcal{H} = \{\mathcal{H}^0, \mathcal{H}^1\}$ is guaranteed to generate the correct behavior, $\mathcal{L}(\mathcal{H}) \subset \tilde{\mathcal{B}}$,

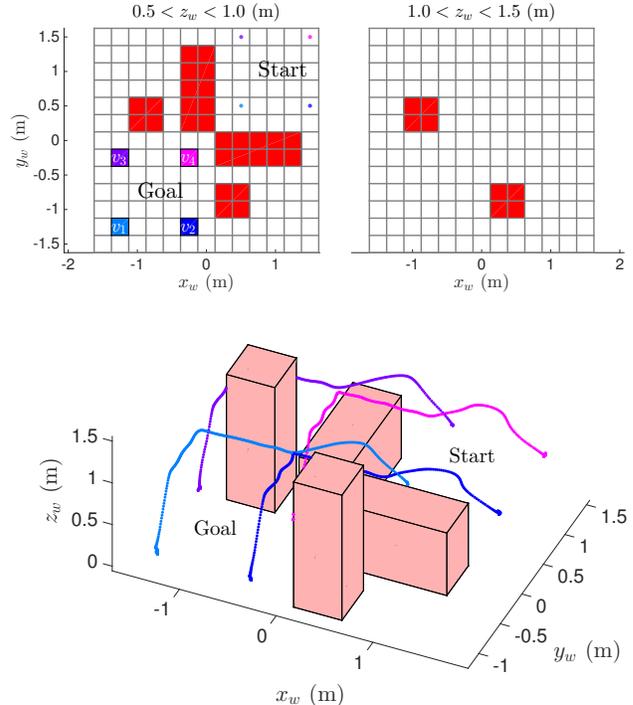


Fig. 6. Experimental results for the square formation scenario shown in Figure 1.

because the individual components $\mathcal{H}_{\mathcal{H}^* \mathcal{F}^* \mathcal{B}^*}$ satisfy (2). Finally, we generate a control policy \mathcal{H}^2 to yield a complete HMA $\mathcal{H}' = \{\mathcal{H}^0, \mathcal{H}^1, \mathcal{H}^2\}$, which also preserves the formation. The control policy can be generated efficiently based on the 27 motion primitives of \mathcal{H}^1 and the box locations of the representative vehicle using any shortest path planning algorithm.

Experimental results are demonstrated for four Crazyflie quadrotors flown indoors using a VICON motion capture system. The top row of Figure 6 shows the gridded 3D workspace, the physical obstacles (red), and the goal boxes (colored). The behavioral constraint is imposed to maintain a square formation. This scenario is challenging because of the intermingling of obstacles amidst the moving formation and because 3D maneuvers are required for obstacle avoidance. The middle row of Figure 6 shows the resulting 3D trajectories in the workspace, demonstrating that the reach-avoid task was successfully executed. A video is available at <http://tiny.cc/hier-moprjm>. It also shows different scenarios involving more vehicles in order to demonstrate the flexibility and scalability of our approach.

In conclusion, we have introduced hierarchical motion primitives to solve the motion planning problem for a large collection of agents. Hierarchical motion primitives are constructed recursively using a hierarchical maneuver automaton. The framework was applied to multi-vehicle formations, yielding novel behaviors such as the ability to pass “through” obstacles while maintaining a formation.

REFERENCES

- [1] R. Alur, T.A. Henzinger, G. Lafferriere, and G.J. Pappas, Discrete abstractions of hybrid systems. *Proceedings of the IEEE*, vol. 88, no 7, pp. 971-984, 2000.
- [2] N. Ayanian and V. Kumar, Abstractions and controllers for groups of robots in environments with obstacles. *Proc. of the IEEE International Conference on Robotics and Automation*, 2010.
- [3] P. E. Caines and Yuan-Jun Wei, Hierarchical hybrid control systems: a lattice theoretic formulation. *IEEE Transactions on Automatic Control*, vol. 43, no. 4, pp. 501-508, 1998.
- [4] M. Denia and A. Ude, Synthesis of new dynamic movement primitives through search in a hierarchical database of example movements. *International Journal of Advanced Robotic Systems*, vol. 12, no. 10, pp. 137-150, 2015.
- [5] M. Egerstedt and X. Hu, Formation constrained multi-agent control. *IEEE Transactions on Robotics and Automation*, vol. 17, no. 6, pp. 947-951, 2001.
- [6] E. Frazzoli, M. A. Dahleh, and E. Feron, Maneuver-based motion planning for nonlinear systems with symmetries. *IEEE Transactions on Robotics*, vol. 21, no. 6, pp. 1077-1091, 2005.
- [7] D. J. Grymin, C. B. Neas, and M. Farhood, A hierarchical approach for primitive-based motion planning and control of autonomous vehicles. *Robotics and Autonomous Systems*, vol. 62, no. 2, pp. 214-228, 2014.
- [8] P. Hubbard and P. E. Caines, Dynamical consistency in hierarchical supervisory control. *IEEE Transactions on Automatic Control*, vol. 47, no. 1, pp. 37-52, 2002.
- [9] L. P. Kaelbling and T. Lozano-Perez, Hierarchical task and motion planning in the now. *Proc. of the IEEE International Conference on Robotics and Automation*, 2011.
- [10] M. Kloetzer and C. Belta, Temporal logic planning and control of robotic swarms by hierarchical abstractions. *IEEE Transactions on Robotics*, vol. 23, no. 2, pp. 320-330, 2007.
- [11] M. Kloetzer and C. Belta, A fully automated framework for control of linear systems from temporal logic specifications. *IEEE Transactions on Automatic Control*. Vol. 53, no. 1, pp. 287-297, 2008.
- [12] D. Kulic, C. Ott, D. Lee, J. Ishikawa, and Y. Nakamura, Incremental learning of full body motion primitives and their sequencing through human motion observation. *International Journal of Robotics Research*, vol. 31, no. 3, pp. 330-345, 2012.
- [13] J. Lygeros, K.H. Johansson, S. Sastry, and M. Egerstedt. On the existence of executions of hybrid automata. *IEEE Conference on Decision and Control*, 1999.
- [14] S. Nagavalli, N. Chakraborty, K. Sycara, Automated sequencing of swarm behaviors for supervisory control of robotic swarms. *Proc. of the IEEE International Conference on Robotics and Automation*, 2017.
- [15] K-K. Oh, M-C. Park, and H-S. Ahn, A survey of multi-agent formation control. *Automatica*, vol 53, no. 3, pp. 424-440, 2015.
- [16] M. Pivtoraiko and A. Kelly, Kinodynamic motion planning with state lattice motion primitives. *Proc. of the International Conference on Intelligent Robots and Systems*, 2011.
- [17] S. J. Russell and P. Norvig, *Artificial Intelligence, a Modern Approach*. Prentice Hall, third edition, 2010.
- [18] I. Saha, R. Ramaithitima, V. Kumar, G. J. Pappas, and S. A. Seshia, Automated composition of motion primitives for multi-robot systems from safe LTL specifications. *International Conference on Intelligent Robots and Systems*, 2014.
- [19] L. Sentis and O. Khatib, Synthesis of whole-body behaviors through hierarchical control of behavioral primitives. *International Journal of Humanoid Robotics*, vol. 2, no. 4, pp. 505-518, 2005.
- [20] X. Sun and C. G. Cassandras, Optimal dynamic formation control of multi-agent systems in constrained environments. *Automatica*, vol. 73, no. 11, pp. 169-179, 2016.
- [21] P. Tabuada, G. J. Pappas, and P. Lima, Compositional abstractions of hybrid control systems. *Proc. of the IEEE Conference on Decision and Control*, 2001.
- [22] M. Vukosavljev, Z. Kroeze, M. E. Broucke, and A. P. Schoellig. A Framework for Multi-Vehicle Navigation Using Feedback-Based Motion Primitives. *Proc. of the International Conference on Intelligent Robots and Systems*, 2017.
- [23] M. Vukosavljev, Z. Kroeze, A. P. Schoellig, and M. E. Broucke. A modular framework for motion planning using safe-by-design motion primitives. *IEEE Transactions on Robotics*, submitted 2018.
- [24] E. M. Wolff, U. Topcu, and R. Murray. Optimal control of non-deterministic systems for a computationally efficient fragment of temporal logic. *Proc. of the IEEE Conference on Decision and Control*, 2013.
- [25] W.M. Wonham and K. Cai, "Supervisory Control of Discrete-Event Systems," [Online]. Available: <http://www.control.utoronto.ca/~wonham/Research.html>.